



CRUSHER BUCKET

BF70.2 S4



1150 mm

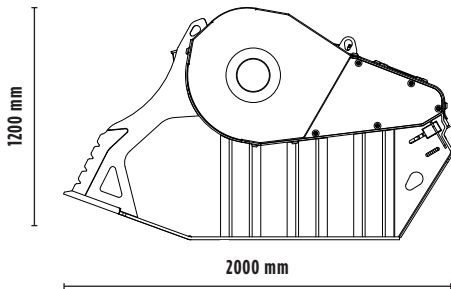

1200 mm

2000 mm



SPECIFICATIONS



Recommended excavator	ton	16 - 25
Weight	ton	2,30
Load capacity	m ³	0,65
Pressure	bar	220 - 280
Back pressure	bar	< 10
Oil flow rate*	l/min	150 - 220
Mouth width	mm	750
Mouth height	mm	510

* The minimum hydraulic flow rate value must be alongside the required operating pressure.

ACCESSORIES

Dust suppression kit	Hour meter
Iron separator	24 month warranty

APPLICATION AREAS



DEMOLITIONS



ROAD WORKS



TUNNELS



ENCLOSED SPACES



PIPELINES



RECYCLING AGGREGATES



URBAN CONSTRUCTION SITES



FOUNDRIES



FOREST MAINTENANCE