

Rammer® E02

EXCELLENCE LINE COMPACT RANGE HAMMER



Rammer's world-renowned Excellence line completes with the Compact range hammers, which offer versatile, reliable solutions for construction applications.

APPLICATIONS



Excavation



Building Construction

MAIN FEATURES AND BENEFITS

THE MOST EFFICIENT OPERATIONS:

- CBE enables plug-and-play installation
- High uptime and easy maintenance based on membrane accumulator
- Compact, right size for the job – optimized fuel consumption


LONG LIFETIME AND SUITABILITY FOR DIFFERENT APPLICATIONS:

- Durability based on the highest quality materials and cast body protection by optional wear plates
- Modular body design structure enables versatile use through the whole lifecycle



The hammer in the picture is equipped with optional: wear plates, automatic greasing device, RD3

Rammer® E02

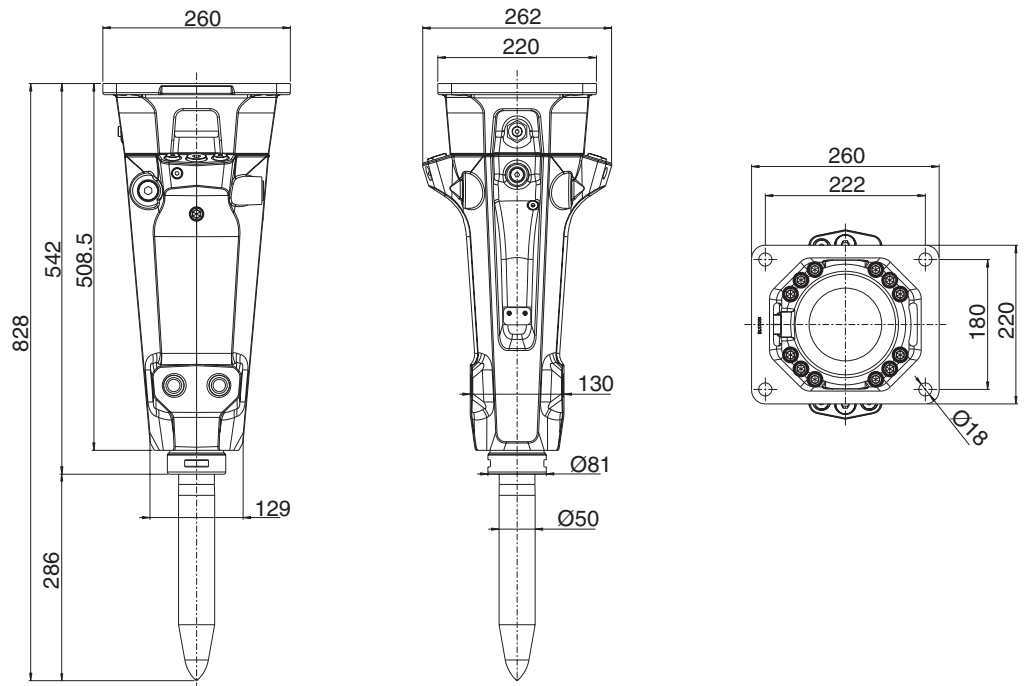

Specifications

Minimum working weight	90 kg (198 lb)
Minimum working weight with greasing device	104 kg (229 lb)
Impact rate	750...2250 bpm
Operating pressure	110...150 bar (1595...2175 psi)
Pressure relief, max	220 bar (3190 psi)
Oil flow range	15...50 l/min (4.0...13.2 gal/min)
Back pressure, max	30 bar (435 psi)
Input power	12.5 kW (17 hp)
Tool diameter	50 mm (1.97 in)
Mini Excavator weight, allowed range	1.2...4.5 t (2600...9900 lb)
Skid steer, robot weight, allowed range	0.7...3.0 t (1500...6600 lb)
Noise level, measured sound power level, LWA	119 dB (119 dB)
Noise level, guaranteed sound power level, LWA	121 dB (121 dB)

Specifications are subject to change without notice



Developed and tested in the harshest of conditions, the foundations of Rammer products are quality, operational reliability and maximized productivity. Long working life and durability ensure our attachments can be used efficiently and economically no matter the challenge at hand, making Rammer a sustainable choice.

Sandvik Mining and Construction Oy

www.rammer.com

Rammer®