

ROTATING PULVERIZER DEMOLITION TOOLS



Rammer® RPV Rotating Pulverizer is ideally suited to a wide range of primary and secondary demolition duties. The built in 360° rotation that comes as standard on RPV Rotating range allows for added maneuverability for fast and effective material separation

APPLICATIONS





MAIN FEATURES AND BENEFITS

LOWER OPERATING COSTS

The protected rotation system allows precision tool placement resulting in lowering owning and operating costs

FIELD REPLACEABLE WEAR PARTS

Designed for quick and easy maintenance





Same bolt pattern as Rammer hammers

HEAVY DUTY COMPONENTS

Extreme durability for any application ensures long component life span



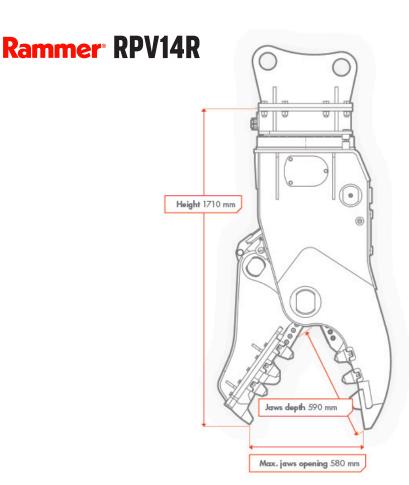

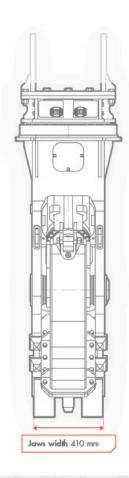

Specifications

Minimum working weight	2540 lbs (1150 kg)
Weight	2310 lbs (1050 kg)
Max jaw opening	22.83" (580 mm)
Jaw width	16.14" (410 mm)
Jaw depth	23.22" (590 mm)
Max operating pressure	5075 psi (350 bar)
Max diameter to be cut	1.38" (35 mm)
Cutting blade length	4.80" (122 mm)
Rotation	360 °
Closing time at max oil flow	2.2 s
Opening time at max oil flow	1.1 s
Carrier weight range	22000-33000 lbs (10-15 T)

 $Specifications \ are \ subject \ to \ change \ without \ notice$



Developed and tested in the harshest of conditions, the foundations of Rammer products are quality, operational reliability and maximized productivity. Long working life and durability ensure our attachments can be used efficiently and economically no matter the challenge at hand, making Rammer a sustainable choice.

Sandvik Rock Processing Solutions

www.rammer.com

