


Rammer® RPV39R

ROTATING PULVERIZER DEMOLITION TOOLS



Rammer® RPV Rotating Pulverizer is ideally suited to a wide range of primary and secondary demolition duties. The built in 360° rotation that comes as standard on RPV Rotating range allows for added maneuverability for fast and effective material separation

APPLICATIONS

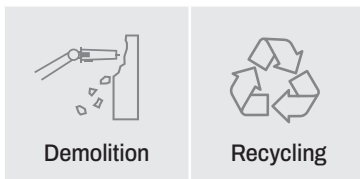

MAIN FEATURES AND BENEFITS

LOWER OPERATING COSTS

The protected rotation system allows precision tool placement resulting in lowering owning and operating costs

FIELD REPLACEABLE WEAR PARTS

Designed for quick and easy maintenance

RAMMER READY


Same bolt pattern as Rammer hammers

HEAVY DUTY COMPONENTS

Extreme durability for any application ensures long component life span



Rammer® RPV39R

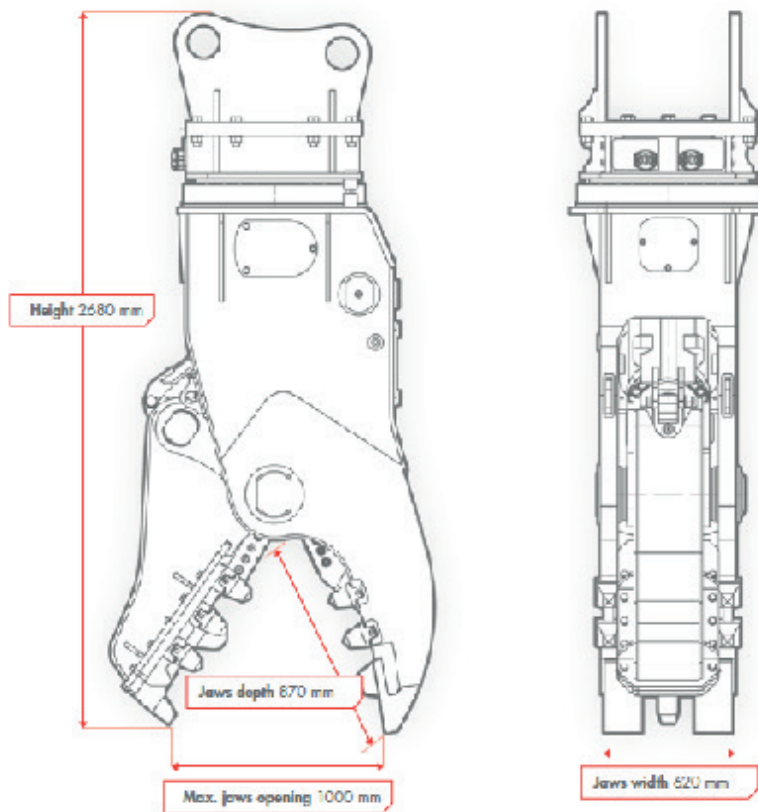

Specifications

Minimum working weight	9360 lbs (4245 kg)
Weight	8650 lbs (3925 kg)
Max jaw opening	39.37" (1000 mm)
Jaw width	24.4" (620 mm)
Jaw depth	34.25" (870 mm)
Cutting blade length	8.7" (220 mm)
Max operating pressure	5075 psi (350 bar)
Max diameter to be cut	2.4" (61 mm)
Rotation	360 °
Closing time at max oil flow	2.9 s
Opening time at max oil flow	2.7 s
Carrier weight range	70500-99200 lbs (32-45 T)

Specifications are subject to change without notice



Developed and tested in the harshest of conditions, the foundations of Rammer products are quality, operational reliability and maximized productivity. Long working life and durability ensure our attachments can be used efficiently and economically no matter the challenge at hand, making Rammer a sustainable choice.

Sandvik Rock Processing Solutions

www.rammer.com