# Rammer RCC16R

Rammer<sup>®</sup> Cutter-Crushers are your all-round solution to primary demolition of heavy built-up concrete structures for carriers between 3 to 130 tons

### **APPLICATIONS**



## MAIN FEATURES AND BENEFITS

#### **INCREASED POWER-TO-WEIGHT RATIO**

Increases the power-to-weight ratio of the product by intensifying the input pressure into the cylinders

#### FIELD REPLACEABLE WEAR PARTS


Designed for quick and easy maintenance

RAMMER READY Same bolt pattern as Rammer hammers

#### HEAVY DUTY COMPONENTS

Extreme durability for any application ensures long component life span

# Rammer<sup>®</sup> RCC16R

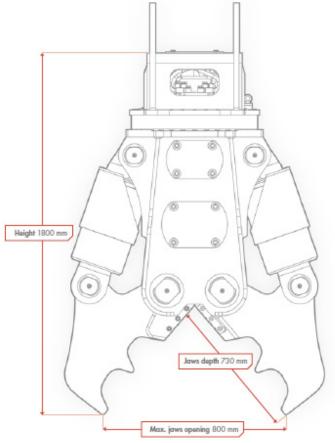

Specifications		
Minimum working weight	3510 lbs (1590 kg)	
Weight	3280 lbs (1490 kg)	
Max jaw opening	32.48" (800 mm)	
Jaw depth	27.5" (730 mm)	
Max cutting force	2840 kN	
Max crushing force	990 kN	
Max operating pressure	4640 psi / 320 bar	
Max diameter to be cut	1.97" (50 mm)	
Cutting blade length	6.30" (160 mm)	
Rotation	360 °	
Closing time at max oil flow	2.5 s	
Opening time at max oil flow	2.5 s	
Carrier weight range	30900 lbs - 39700 lbs (14-18 T)	

Specifications are subject to change without notice



Developed and tested in the harshest of conditions, the foundations of Rammer products are quality, operational reliability and maximized productivity. Long working life and durability ensure our attachments can be used efficiently and economically no matter the challenge at hand, making Rammer a sustainable choice.

Sandvik Rock Processing Solutions www.rammer.com

