


Rammer[®] Cutter-Crushers are your all-round solution to primary demolition of heavy built-up concrete structures for carriers between 3 to 130 tons

APPLICATIONS



MAIN FEATURES AND BENEFITS

INCREASED POWER-TO-WEIGHT RATIO

Increases the power-to-weight ratio of the product by intensifying the input pressure into the cylinders

FIELD REPLACEABLE WEAR PARTS


Designed for quick and easy maintenance

RAMMER READY Same bolt pattern as Rammer hammers

HEAVY DUTY COMPONENTS

Extreme durability for any application ensures long component life span

Rammer[®] RCC21R

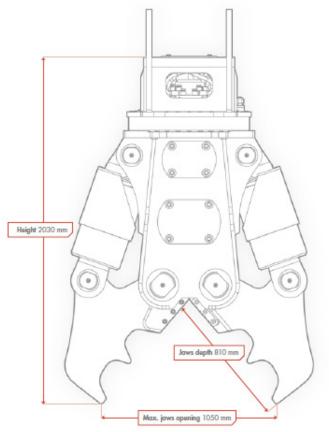

Specifications		
Minimum working weight	4920 lbs (2230 kg)	
Weight	4520 lbs (2050 kg)	
Max jaw opening	38.78" (1050 mm)	
Jaw depth	31.5" (810 mm)	
Max cutting force	3290 kN	
Max crushing force	1270 kN	
Max operating pressure	4640 psi / 320 bar	
Max diameter to be cut	2.28" (58 mm)	
Cutting blade length	6.89" (175 mm)	
Rotation	360°	
Closing time at max oil flow	2.2 s	
Opening time at max oil flow	3.7 s	
Carrier weight range	39700 lbs - 52900 lbs (18-24 T)	

Specifications are subject to change without notice



Developed and tested in the harshest of conditions, the foundations of Rammer products are quality, operational reliability and maximized productivity. Long working life and durability ensure our attachments can be used efficiently and economically no matter the challenge at hand, making Rammer a sustainable choice.

Sandvik Rock Processing Solutions www.rammer.com

