

Rammer<sup>®</sup> Cutter-Crushers are your all-round solution to primary demolition of heavy built-up concrete structures for carriers between 3 to 130 tons

## **APPLICATIONS**





# MAIN FEATURES AND BENEFITS

#### **INCREASED POWER-TO-WEIGHT RATIO**

Increases the power-to-weight ratio of the product by intensifying the input pressure into the cylinders

### FIELD REPLACEABLE WEAR PARTS


Designed for quick and easy maintenance

RAMMER READY Same bolt pattern as Rammer hammers

#### HEAVY DUTY COMPONENTS

Extreme durability for any application ensures long component life span

# Rammer<sup>®</sup> RCC43R

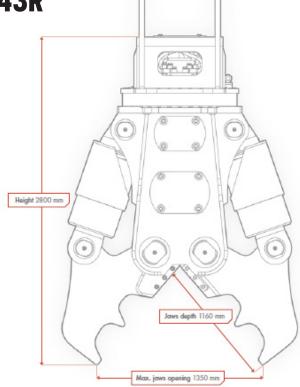

#### Specifications

Minimum working weight	10,520 lbs (4770 kg)
Weight	9,810 lbs (4450 kg)
Max jaw opening	53.15" (1350 mm)
Jaw depth	45.7" (1160 mm)
Max cutting force	5460 kN
Max crushing force	1900 kN
Max operating pressure	4640 psi / 320 bar
Max diameter to be cut	3.15" (80 mm)
Cutting blade length	11.81" (300 mm)
Rotation	360 °
Closing time at max oil flow	4.4 s
Opening time at max oil flow	4.2 s
Carrier weight range	77200 lbs - 110200 lbs (35-50 T)

Specifications are subject to change without notice



Developed and tested in the harshest of conditions, the foundations of Rammer products are quality, operational reliability and maximized productivity. Long working life and durability ensure our attachments can be used efficiently and economically no matter the challenge at hand, making Rammer a sustainable choice.

Sandvik Rock Processing Solutions www.rammer.com

