

RAMMER R45P



PERFORMANCE LINE



VIBRATION AND
SOUND SUPPRESSED

IDLE BLOW PROTECTION
(FIELD ADJUSTABLE ON/OFF)

RAMLUBE II GREASING
SYSTEM

EXCELLENT POWER-
TO-WEIGHT RATIO

NITROGEN PISTON
ACCUMULATOR

PRESSURE DAMPENING
MEMBRANE ACCUMULATOR

QUICK CHANGE TOOL SYSTEM

EASY TO SERVICE




UNBEATABLE PERFORMANCE


The new Rammer Performance Line hammers are your everyday solution for a wide range of breaking demands. Designed with proven Rammer features and standards, these Rammer Performance Line hammers offer more than just excellent power-to-weight ratio, they bring the quality reassurance that only a true Rammer hammer can bring.

Read more about the product from www.rammer.com



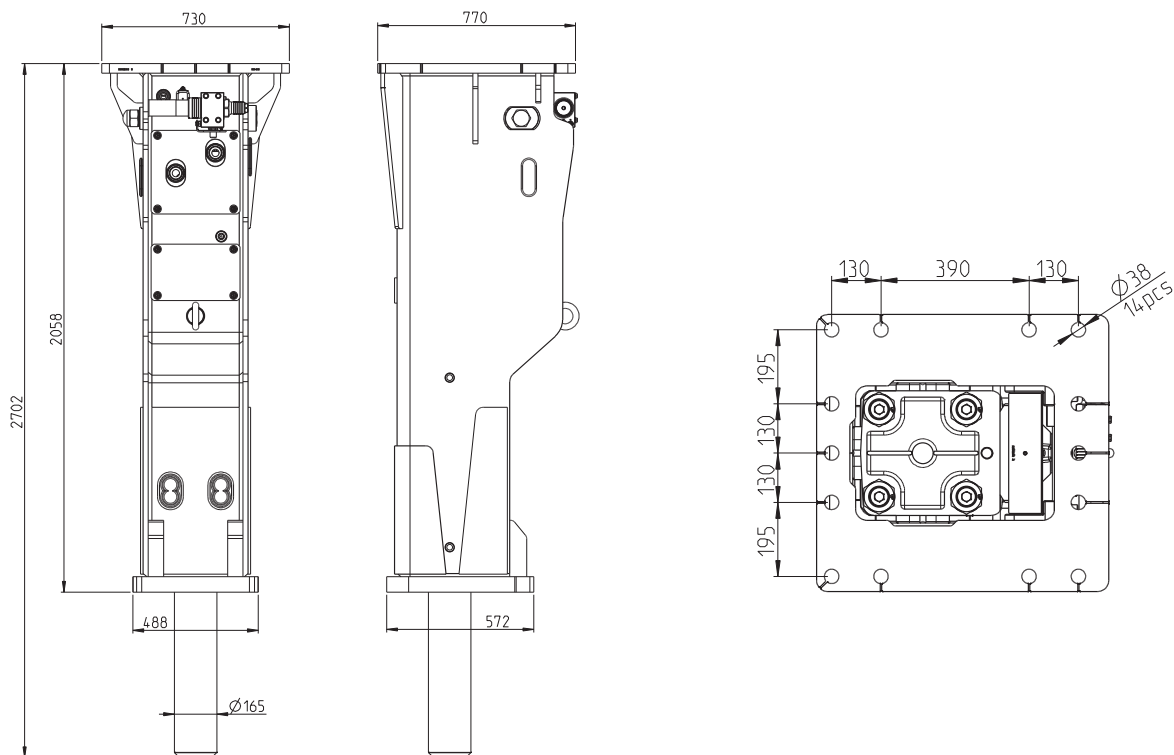

ACCESSORIES



Ramlube II

Lubrication system for optimum wear and impact protection.



RD3

RD3 remote monitoring system gives you detailed information about the operating hours, service intervals and GPS location of your product.

Min. working weight, kg (lb)	2950 (6500)
Tool diameter, mm (in)	165 (6.50)
Oil flow range, l/min (gal/min)	200 - 250 (52.8 - 66.0)
Impact rate, bpm	360 - 630
Operating pressure, bar (psi)	160 - 180 (2 320 - 2 610)
Pressure relief, min, bar (psi)	210 (3 045)
Pressure relief, max, bar (psi)	230 (3 335)
Back pressure, max, bar (psi)	10 (145)
Input power, kW (hp)	75 (101)
Carrier weight, allowed range, t (lb)	32 - 53 (70 500 - 116 844)
Noise level measured sound power level, LWA, dB(A)	124
Noise level guaranteed sound power level, LWA, dB(A)	128

TOOLS



Moil point tool



Chisel tool



Blunt tool



Pyramid tool

