


AM200

AMPHIBIOUS EXCAVATOR

Power by CAT320 Upperbody with Standard Arm
EIK Undercarriage & 48" Wide Digging Bucket



AM200-6 DIMENSIONS

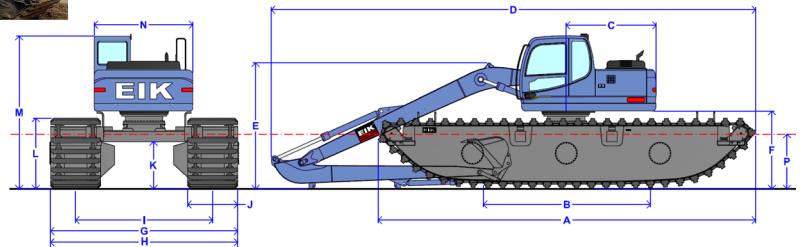

An amphibious excavator/ marsh buggy is specifically designed to maneuver in marshy, swampy areas and soft terrain. It is completely self-propelled and can virtually access all terrains while requiring minimum supporting transportation and hoisting equipment.

It can also float on water as an added safety features. When fitted with a 50-ft long reach front, you gain access to previously inaccessible areas.

The high-performance amphibious excavator is powered by our patented "multi-synchronous hydraulic motor direct drive" system; which is the pivotal technology that positions us at the forefront of amphibious excavator design.

Great versatility can be easily attained when used in conjunction with the wide range of attachments we produce. We have in-house expertise in designing custom attachments to tackle unique challenges where traditional off the shelf solutions fail to deliver.

Long Reach option upgrade
Achieve greater digging depth and further working range

Hydraulically extendable
Powered retraction/ expansion from within the cab, easy preparation for transport and travel through tight work areas on the job site

Side Pontoons and Spuds
Hydraulically deploy and retract vertical spuds to provide additional stability and enhanced operability in water up to 4m deep

Polymer pads
Lighter in weight and surface friendly

Slewing Rings
Necessary for non-CAT uppers. We can fit any excavator brand!

20 ton (44,000 lb) class excavator

Label	Description	Value 1	Value 2
A	Maximum Track Length	9.63	31' 7"
B	Track Length On Ground	4.50	14' 9"
C	Rear Upperstructure Length*	2.85	9' 4"
D	Overall Length**	13.55	44' 6"
E	Height of Boom**	3.47	11' 5"
F	Upperstructure Clearance*	2.17	7' 1"
G	Overall Width, min/max	4.50 / 5.98	14' 9" / 19' 7"
H	Undercarriage Width, min/max	4.47 / 5.95	14' 8" / 19' 6"
I	Track Gauge, min/max	2.85 / 4.33	9' 4" / 14' 3"
J	Track Cleat Width	1.62	5' 4"
K	Minimum Ground Clearance	1.30	4' 3"
L	Track Height	2.03	6' 8"
M	Overall Cab Height*	4.08	13' 5"
N	Upperstructure Overall Width*	2.54	8' 4"
P	Estimated Water Level	1.55	5' 1"

*Based on CAT320D | **Based on 14m long reach front